


## *New Product Bulletin*

### X-band 40kW Magnetron

#### M 1 1 8

M118 is a mechanically tunable frequency pulsed type X-band magnetron; designed to operate in the frequency range of 8.5 GHz to 9.6 GHz with a peak output power of 40kW.

It is a waveguide output type and is forced air cooled. A permanent magnet is packaged as part of the magnetron.

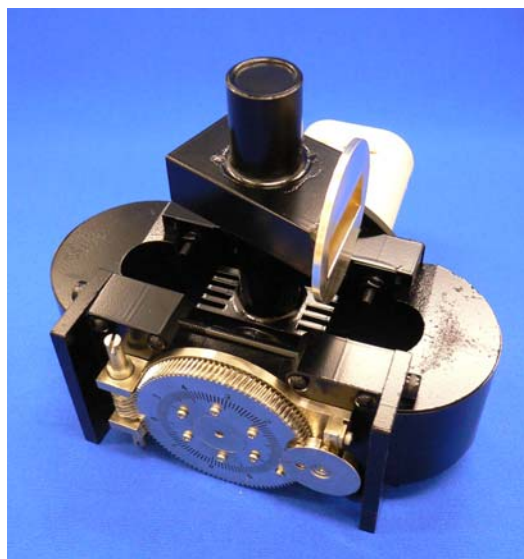

#### GENERAL CHARACTERISTICS

##### ---ELECTRICAL---

Heater voltage (note 1)	6.3 V
Heater current	1.0 A
Minimum preheat time	120 sec

##### ---MECHANICAL---

Dimensions	see outline drawing
Net weight	2.3 kg approximately
Mounting position	any
Cooling (note 5)	forced air.
Output coupling	M85/1-073 with M3922/59-007 choke flange

All specifications are subject to change without notice.

**New Japan Radio Co., Ltd.**

**ABSOLUTE MAXIMUM RATINGS**

These ratings cannot necessarily be used simultaneously and no individual ratings should be exceeded.

	Min	Max	Units
Heater voltage	—	7.0	V
Peak anode voltage	—	16	kV
Peak anode current	—	16	A
Average anode power input (note 2)	—	230	W
Duty cycle	—	0.0012	—
Pulse duration	—	1.0	$\mu$ s
Anode temperature (note 5)	—	150	°C
V.S.W.R. at the output coupler	—	1.5:1	—

**TEST CONDITIONS AND LIMITS**

The tube is tested to comply with the following electrical specification:

<u>Test Conditions</u>	Oscillation	Units
Heater voltage (preheating)	6.3	V
Heater voltage (operating) (note 1)	0	V
Pulse duration (note 3)	1.0	$\mu$ s
Duty cycle	0.001	—
Rise time of voltage pulse (note 4)	0.2 Max.	$\mu$ s
Average anode current	14	mA
Duty cycle	0.001	—
V.S.W.R. at the output coupler	1.1 Max.	—

<u>Limits</u>	Min	Max	Units
Peak anode voltage(note 7)	13	15	kV
Average output power	40	—	W
Frequency	8.5	9.6	GHz
R.F bandwidth at 1/4 power(note 7)	—	3	MHz
Frequency pulling: (note 7) (V.S.W.R. not less than 1.5:1)	—	18	MHz
Heater current (note 6)	0.9	1.1	A

All specifications are subject to change without notice.

**New Japan Radio Co., Ltd.**

**NOTE:**

1. Heater voltage must be reduced within 3 sec after the application of high voltage according to the following schedule.

$$E_f = 6.3 \sqrt{1 - \frac{P_i}{150}} \text{ (V)}$$

For average input power greater than 150 W, the heater voltage must be reduced to 0 V.

2. The various parameters are related by the following formula:

$$P_i = i_b \times e_{p_y} \times D_u$$

where  $P_i$  = mean input power in watts  
 $i_b$  = peak anode current in amperes  
 $e_{p_y}$  = peak anode voltage in volts  
 $D_u$  = duty cycle

3. Tolerance  $\pm 10 \%$
4. Defined as the rising time of the high voltage pulse between 10 % and 90 % amplitude. Any capacitance in the viewing system must not exceed 6.0pF.
5. The anode temperature measured at the point indicated on the outline drawing must be kept below the limit specified by means of a suitable flow of air.
6. Measured with heater voltage of 6.3 V and no anode input power.
7. Peak anode voltage, R.F. bandwidth at 1/4 power and frequency pulling are measured at 9.3GHz.

All specifications are subject to change without notice.

**New Japan Radio Co., Ltd.**

OUTLINE (1 / 2): ( Mark “\*\*” put on the symbols means design test only.)

Symbol	Minimum	Maximum
A	–	150.8
** B	$\phi$ 81.8	$\phi$ 83.3
** C	74.2	77.4
D	$\phi$ 4.16	$\phi$ 4.42
E	$\phi$ 4.82	$\phi$ 4.98
F	12.45	12.95
** G	3.2	
** J	5.0	
** K	2.8	3.3
** L	11.15	
M	1.1	–
N	2.85	5.87
P	$\phi$ 72.87	$\phi$ 73.18
R	56.47	57.99
** S	3.8	
** T	1.1	
U	–	55.6
** V	$\phi$ 4.74	$\phi$ 4.81
** W	3.96	
X	2.03	2.29
Y	6.63	7.64
Z	29.8	30.8
** AB	30°	
AC	59° 48′	60° 12′
AD	49.63	50.39
AF	–	57.2
AG	–	93.7
AH	72.0	73.0
** AJ	18° 42′	
** AL	–	78.2
AP	7.8	–
** AR	$\phi$ 66.5	$\phi$ 66.8
AU	0.6	1.0
AV	3.96	–
AX	–	6.23
AZ	–	70.6
BA	39.17	40.19
BB	–	34.1
BD	–	99.2
BE	$\phi$ 44.27	$\phi$ 44.63
BG	$\phi$ 36.53	






Dimensions in millimeters.

Mark \*\* put on the symbols means design test only.

All specifications are subject to change without notice.

**New Japan Radio Co., Ltd.**

OUTLINE (2/2)

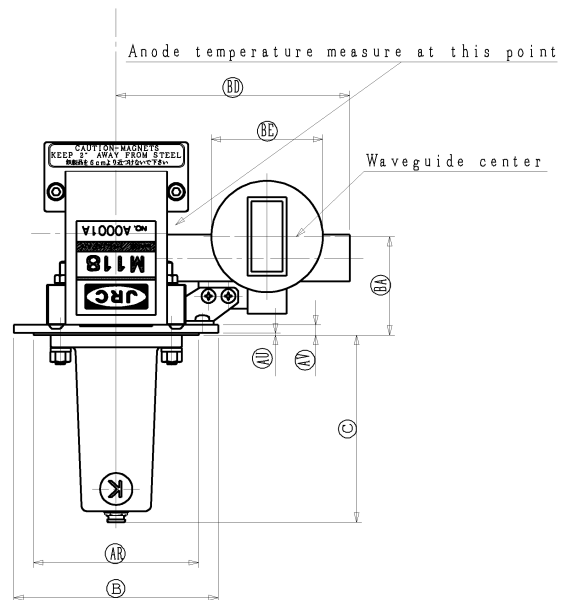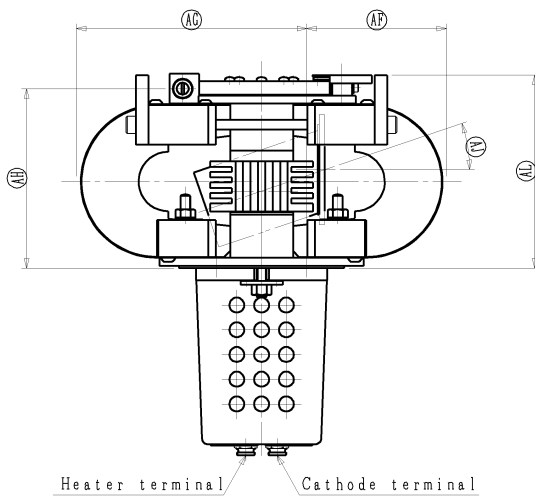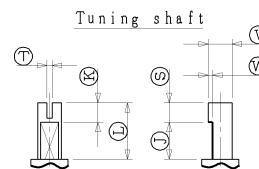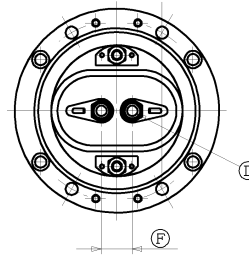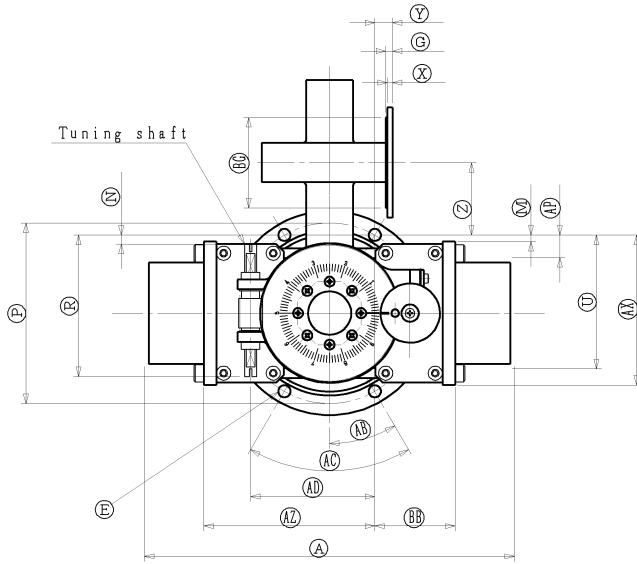

All specifications are subject to change without notice.

New Japan Radio Co., Ltd.